



納入面

図面番号

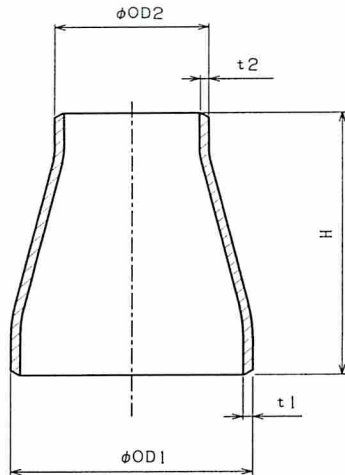

同心レジューサ

ベベルエンドの形状、寸法

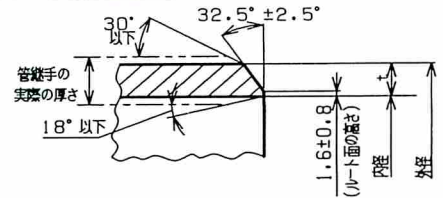

ベベルエンドの形状・寸法

径の呼び (B)	大径側				小径側				端面から端面 までの距離 (H)
	外径 (OD1)	厚さ (t1)		外径 (OD2)	厚さ (t2)				
		S10S	S20S		S10S	S20S			
3/4 × 1/2	27.2	2.1	2.5	21.7	2.1	2.5	38.1		
1 × 3/4	34.0	2.8	3.0	27.2	2.1	2.5	50.8		
	34.0	2.8	3.0	21.7	2.1	2.5	50.8		
1 1/4 × 1	42.7	2.8	3.0	34.0	2.8	3.0	50.8		
	42.7	2.8	3.0	27.2	2.1	2.5	50.8		
1 1/2 × 1 1/4	48.6	2.8	3.0	42.7	2.8	3.0	63.5		
	48.6	2.8	3.0	34.0	2.8	3.0	63.5		
	48.6	2.8	3.0	27.2	2.1	2.5	63.5		
2 × 1 1/2	60.5	2.8	3.5	48.6	2.8	3.0	76.2		
	60.5	2.8	3.5	42.7	2.8	3.0	76.2		
	60.5	2.8	3.5	34.0	2.8	3.0	76.2		
2 1/2 × 2	76.3	3.0	3.5	60.5	2.8	3.5	88.9		
	76.3	3.0	3.5	48.6	2.8	3.0	88.9		
	76.3	3.0	3.5	42.7	2.8	3.0	88.9		
3 × 2 1/2	89.1	3.0	4.0	76.3	3.0	3.5	88.9		
	89.1	3.0	4.0	60.5	2.8	3.5	88.9		
	89.1	3.0	4.0	48.6	2.8	3.0	88.9		

指定なき寸法許容差は JIS B 2313 に準ずる

名称	鋼製突合せ溶接式管継手	材質	SUS304W	数量	—	備考	—
品名	同心レジューサ (3/4B~3B)	納入先	殿				
古 林 工 業 株 式 会 社				担当	確認	承認	
				c-y 4-7.5	/		