



納入面

図面番号

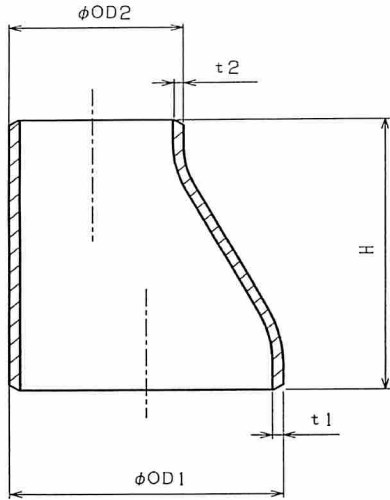

偏心レジューサ

ベベルエンドの形状, 寸法

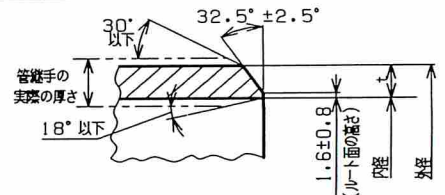

ベベルエンドの形状・寸法

径の呼び (B)	大径側				小径側				端面から端面 までの距離 (H)
	外径 (OD1)	厚さ (t1)		外径 (OD2)	厚さ (t2)				
		S10S	S20S		S10S	S20S			
3½ ×	3	101.6	3.0	4.0	89.1	3.0	4.0	101.6	
	2½	101.6	3.0	4.0	76.3	3.0	3.5	101.6	
	2	101.6	3.0	4.0	60.5	2.8	3.5	101.6	
4 ×	3½	114.3	3.0	4.0	101.6	3.0	4.0	101.6	
	3	114.3	3.0	4.0	89.1	3.0	4.0	101.6	
	2½	114.3	3.0	4.0	76.3	3.0	3.5	101.6	
	2	114.3	3.0	4.0	60.5	2.8	3.5	101.6	
5 ×	4	139.8	3.4	5.0	114.3	3.0	4.0	127.0	
	3½	139.8	3.4	5.0	101.6	3.0	4.0	127.0	
	3	139.8	3.4	5.0	89.1	3.0	4.0	127.0	
	2½	139.8	3.4	5.0	76.3	3.0	3.5	127.0	
6 ×	5	165.2	3.4	5.0	139.8	3.4	5.0	139.7	
	4	165.2	3.4	5.0	114.3	3.0	4.0	139.7	
	3½	165.2	3.4	5.0	101.6	3.0	4.0	139.7	
	3	165.2	3.4	5.0	89.1	3.0	4.0	139.7	

指定なき寸法許容差は JIS B 2313 に準ずる

名称	鋼製突合せ溶接式管継手	材質	SUS304W	数量	—	備考	—
品名	偏心レジューサ (3½B ~ 6B)	納入先	殿				
古 林 工 業 株 式 会 社				担当	確認	承認	
				0.7 42.5			